

WDG-VCM

FLUE GAS OXYGEN, COMBUSTIBLES & HYDROCARBON ANALYZER

Close-coupled extractive design for fast response in a wide range of flue gas applications up to 3000°F (1648°C). Completely field serviceable.



SENSOR

Principle of Operation: Zirconium oxide for net oxygen measurement and dual hot-wire catalytic detectors for both combustibles and methane.

Output Range:

Oxygen: From 0-1 to 0-100%
 Combustibles: 0-1000 PPM with Overrange
 0-2,000 PPM to 0-10,000 PPM,
 0-2 to 0-5%
 Hydrocarbon: 0-5%

Accuracy:

Oxygen: ±0.75% of measured value or ±0.05%, whichever is

greater

Combustibles: ±2% of full scale output range

Hydrocarbon: ±5% of full scale output range

Response:

Response to Calibration Gas: Less than 3 seconds

Oxygen: 90% of a step change < 11 seconds with Flame Arrestors
 Combustibles & Hydrocarbon: 90% of a step change < 20 seconds with Flame Arrestors

Aspirator Air Requirements: 3 SCFH Typical at 3 to 6 psig, Instrument air or Nitrogen

Analog Output: Three isolated linear current outputs for O₂, combustibles and hydrocarbon. Each output can be 4-20 mA, 0-20 mA, 20-4 mA or 20-0 mA and is fully scalable. NAMUR Configurable. Hold or track during calibration. Max. load 1200 Ω

Alarms: Five independent, NO alarms
 Set relays to energize or de-energize on alarm

Contact Rating: 0.5A, 30V, 10VA max. non-inductive load, AC or DC

Digital Communication: 2 wire MODBUS RTU, 57.6 Kbaud

Configuration: MODBUS RTU, AMETEK configuration software, or AMEvision HMI

Diagnostics: Low Sample Flow, Cell & Detector age tracking, Cell resistance, Calibration required, Analog current verification

Calibration: Calibrate or verify calibration. Stored calibration and verification data. Selectable calibration gas run time and process recovery time. Timed automatic calibration with optional Remote Calibration Unit.

Sample Pressure: ±6 in. water gauge

Max. Sample Dewpoint: 392°F (200°C)

Max. Flue Gas Temp. / Probe Type / Lengths:

1300°F (704°C) / 316 SS / 36" - 108"(91 cm - 274 cm)
 1875°F (1024°C) / 310 SS / 36" - 108"(91 cm - 274 cm)
 3000°F (1648°C) / Hexoloy® / 24" - 72" (60 cm - 182 cm)

Environment:

Ambient Temp.: -30°C to 65°C

Relative Humidity: 5% to 95%, non-condensing

Enclosure: Hinged IP65 (NEMA 4X), weather resistant, stainless steel, Purged, and floor mount versions available. UL Class I, Div II, Gp B, C, D or ATEX II 3G Ex pz IIC T3 Gc and IECEx, T3 with Purge

Power Requirements: 115 VAC, ±10%, 47-63 Hz, 740 VA max.; 230 VAC, ±10%, 47-63 Hz, 740 VA max.

Calibration Gas Requirements: Use calibration gases @ 10 psig, 3 SCFH (0.7 L/min.)

O₂ Span Gas: Air or from 1.0% to 100% O₂, balance N₂
O₂, Comb. & CH₄ Zero Gases: From 0.1 to 10% O₂, balance N₂

Comb. Span Gas: 60 to 80% (PPM ranges) or 40% to 60% (% ranges) of the selected comb. recorder output range in certified equal mixtures of CO + H₂, 3-4% O₂, balance N₂

Hydrocarbon Span Gas: 2% CH₄, 8% to 10% O₂, balance N₂

AMEVISION HMI



Display: 4.2" Color 1/4W VGA with Graphical User Interface. Password protected.

Keypad: 18 key, Membrane

Input: 2 wire MODBUS RTU from Sensor. Host capable up to 4 sensors

Digital Outputs: 2 or 4 wire MODBUS RTU, TCP/IP Ethernet with embedded Web Server (RJ45 connection), USB Port for Data collection or software update.

Environment:

Ambient Temp.: -25° to 60°C

Power Requirements: Nominal 115-230 VAC ±10%, 47-63 Hz, 75 VA max.

Enclosure: IP65 (NEMA 4X); Division 2 or optional Zone 2

System Compliance:

EMC Directive 2004/108/EC



Low Voltage Directive 73/23/EEC

WDG-VCM ANALYZER


STANDARD SENSOR ENCLOSURE

APPROX. WEIGHT: 44 LB (20kg)

INCHES
MM

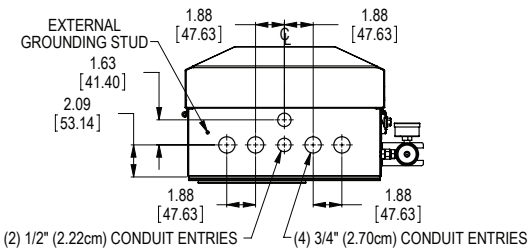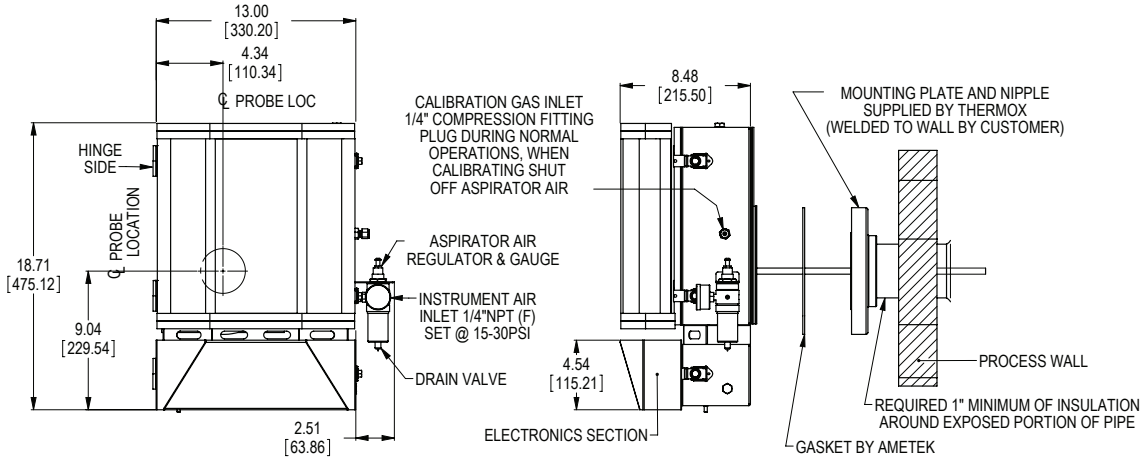


AMEVISION HMI

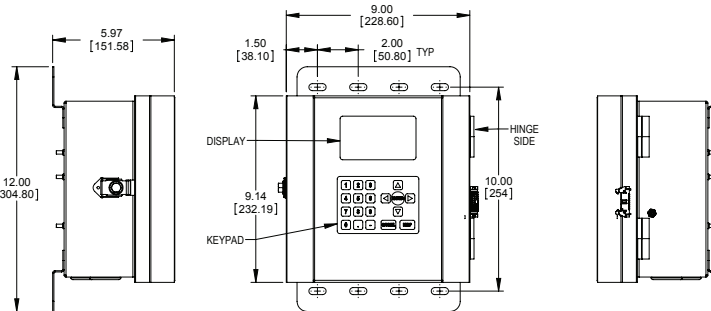

REMOTE CALIBRATION UNIT

RCU ENCLOSURE NEMA 4X

INSTRUMENT GRADE
AIR INLET
60 PSI MAX (4.2KG/CM²)
1/4\"/>

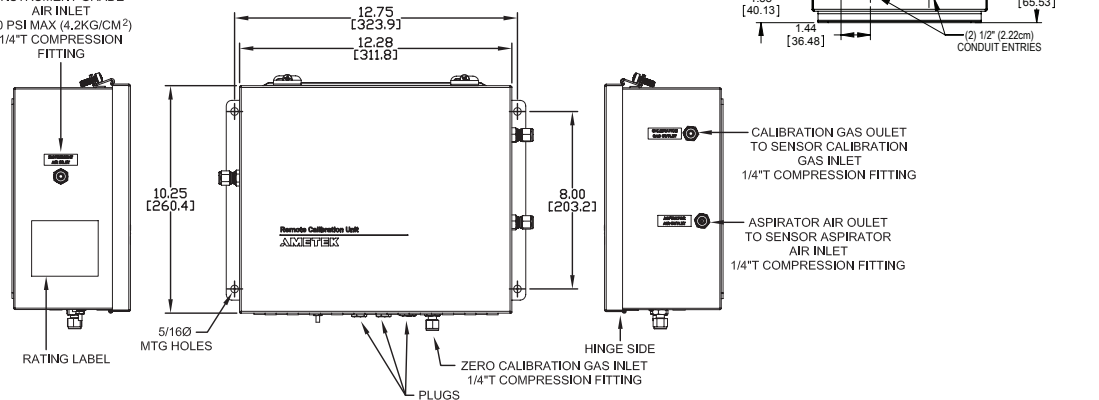

AMETEK
PROCESS INSTRUMENTS

150 Freeport Road, Pittsburgh, PA 15238
Ph. +1-412-828-9040, Fax +1-412-826-0399
www.ametekpi.com

SALES, SERVICE AND MANUFACTURING:

USA - Pennsylvania
150 Freeport Road, Pittsburgh PA 15238 • Tel: +1-412-828-9040, Fax: +1-412-826-0399

USA - Delaware
455 Corporate Blvd., Newark DE 19702 • Tel: +1-302-456-4400, Fax: +1-302-456-4444

Canada - Alberta
2876 Sunridge Way N.E., Calgary AB T1Y 7H2 • Tel: +1-403-235-8400, Fax: +1-403-248-3550

WORLDWIDE SALES AND SERVICE LOCATIONS:

USA - Houston, Texas
Tel: +1-713-466-4900, Fax: +1-713-849-1924

BRAZIL
Tel: +55 19 2107 4100

CHINA
Beijing / Tel: +86 10 8526 2111, Fax: +86 10 8526 2141
Chengdu / Tel: +86 28 8675 8111, Fax: +86 28-8675 8141
Shanghai / Tel: +86 21 6426 8111, Fax: +86 21 6426 7818

FRANCE
Tel: +33 1 30 68 89 20, Fax: +33 1 30 68 89 99

GERMANY
Tel: +49 21 59 91 36 0, Fax: +49 21 59 91 3639

INDIA
Tel: +91 80 6782 3200, Fax: +91 80 6782 3232

SINGAPORE
Tel: +65 6484 2388, Fax: +65 6481 6588



© 2016, by AMETEK, Inc.
All rights reserved. Printed in the U.S.A.
F-0410 Rev. 11 (0317)

One of a family of innovative process analyzer solutions from AMETEK Process Instruments.
Specifications subject to change without notice.

THE
RMOX[®]